






Fully Supported Tapered Transition.

Exterior Baffle Design Prevents Debris Build-Up.

Low Profile Blends into Roof.

## Your Multi-Purpose Exhaust Vent Solution.

### EXHAUST INSTALLATION APPLICATIONS:

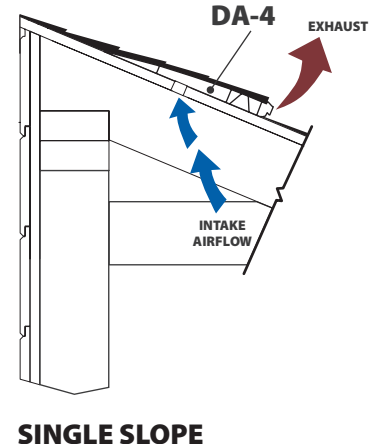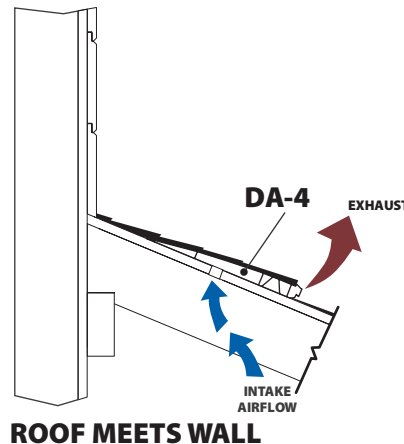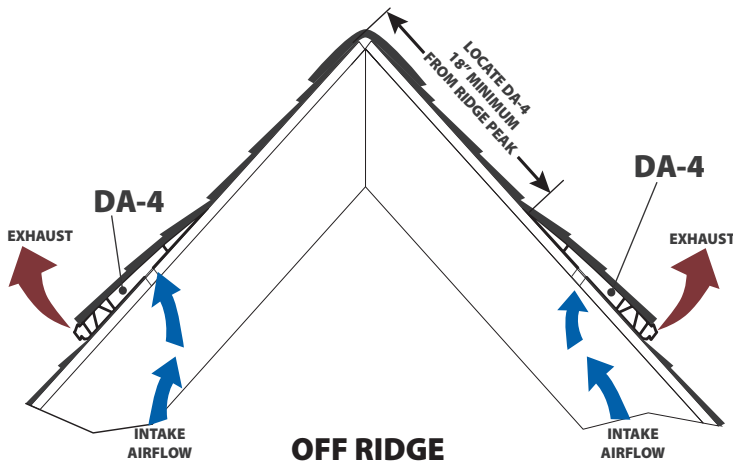

### DA-4 FEATURES:

- 2½" ring-shank nails included.
- Made from the same durable, long-lasting and field-tested material as Omni Series vents.
- Unique design provides enhanced weather protection.
- Integrated end plug every 2 inches.
- 9 square inches of Net Free Area per linear foot.
- Molded nail lines.
- Fits roof pitches 3/12 to 16/12.
- Slot width guidelines.
- Patented design.
- The DA-4 can be used as an intake vent (see reverse).
- **Lifetime Limited Warranty.**

Model	Length (ft.)	NFA (in. <sup>2</sup> )	Roof Pitch	Packaged
DA-4	4'	36	3/12 to 16/12	10 Per Box

Molded-in Cut Lines for Tapered Transitions.

Engineered Material Guarantees Longevity.

10 Supported Nail Holes.

Shingle Stop Alignment Tabs.




Lomanco recommends balancing the intake ventilation system to the chosen exhaust ventilation system, a balanced system consists of 50% intake ventilation and 50% exhaust ventilation.

Lomanco ventilation calculations are based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space. For ventilation calculators and additional information, visit our website, [lomanco.com](http://lomanco.com).



## Off Roof Edge Installation

# Roof Deck Installed Intake Ventilation Made for Roofers.

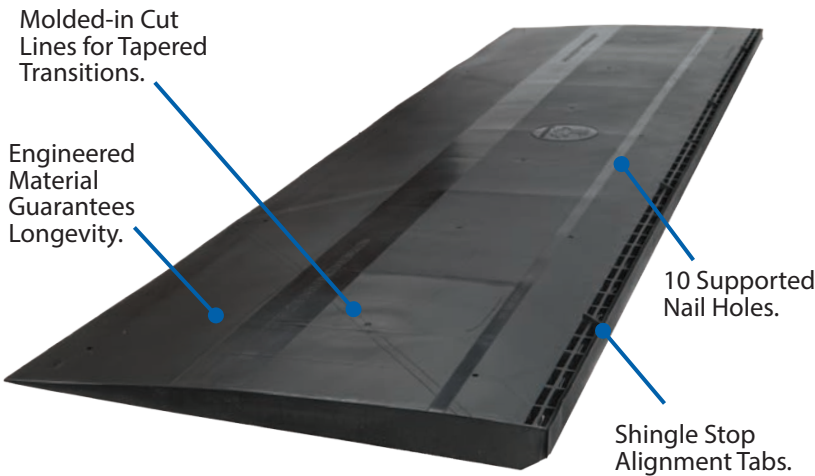

### DA-4 FEATURES:

- 2½" ring-shank nails included.
- Made from the same durable, long-lasting and field-tested material as Omni Series vents.
- Unique design provides enhanced weather protection.
- Integrated end plug every 2 inches.
- 9 square inches of Net Free Area per linear foot.
- Molded nail lines.
- Fits roof pitches 3/12 to 16/12.
- Intake slot width guidelines.
- Patented design.
- The DA-4 can be used as an exhaust vent (see reverse).
- **Lifetime Limited Warranty.**



FL17202

Model	Length (ft.)	NFA (in. <sup>2</sup> )	Roof Pitch	Packaged
DA-4	4'	36	3/12 to 16/12	10 Per Box

Lomanco recommends balancing the intake ventilation system to the chosen exhaust ventilation system, a balanced system consists of 50% intake ventilation and 50% exhaust ventilation.

Lomanco ventilation calculations are based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space. For ventilation calculators and additional information, visit our website, [lomanco.com](http://lomanco.com).